

**3M** Science.  
Applied to Life.™

# Protecta® RailDog™ Hi-Vis Sliding Rail Anchor



**Ideal for Tying Off  
Onto a Railway or Crane Rail**

now proudly  
part of 3M:



# Protecta® RailDog™ Hi-Vis Sliding Rail Anchor

The Protecta® RailDog™ Hi-Vis Sliding Rail Anchor provides a mobile anchor point allowing workers that are either working on a railway, or crane rail runway, with less than 15 degrees of slope, a compliant means to anchor a personal fall arrest system. The RailDog allows the user to quickly and easily attach the anchor unit to the rail and then connect their shock absorbing lanyard.

The anchor has been designed with the ability to slide along the rail to provide some horizontal movement, however it is not designed to pass rail splice plates.

## High Strength Autolock Karabiner.....

With a 22 kN rated gate and overall strength, this karabiner allows the user to tie-off using a standard double action snap hook and eliminates side load hazards and the risks of accidental disengagement (roll-out)

## Lightweight, Compact and Portable

Compact and lightweight design makes transporting and attachment to the rail simple, fast and easy

## Elongated Karabiner Slot.....

20 mm elongated slot ensures smooth travel and helps reduce karabiner jamming

## Stainless Steel Construction

Rugged corrosion resistant stainless steel construction provides high strength for maximum durability in the toughest of environments and strong and safe connections

## High Visibility Label.....

Provides increased visibility and protection to rail workers in low light conditions

## Versatile Size Range

Accommodates a wide range of rail sizes and profiles from 69.9 mm to 82.6 mm




**Fast & Easy Installation** Quick and easy to install - no tools required, simply attach the anchor in 3 easy steps and then connect your personal fall arrest system


**Step 1:** Remove karabiner and separate RailDog halves



**Step 2:** Place RailDog halves around rail head and slide the sections together

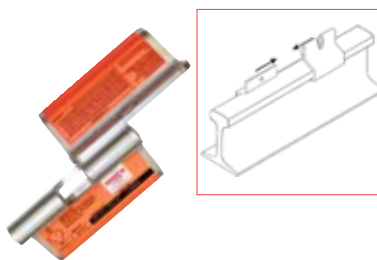

**Step 3:** Lock the sections together with the supplied karabiner



## Specifications:

**Part Number:** 2199938. **Hardware:** Body - 304 Grade Stainless Steel; Karabiner - Auto lock, Zinc Plated Steel, minimum tensile strength 22 kN. **Capacity:** One user - 140 kg (user and tools). **Weight:** 2.3 kg. **Compatibility:** PROTECTA RailDog Hi-Vis Sliding Rail Anchor is designed for use with Protecta approved components and systems. **Standards:** OSHA 1910.66, OSHA 1926.502, ANSI Z359.1. **Country of Origin:** U.S.A. **Special Instructions/Conditions of Use:** Reading user instruction manual prior to use is essential.



**3M Fall Protection Business**  
Capital Safety, 95 Derby Street  
Silverwater, NSW, 2128  
Australia

Australia: 1800 245 002  
New Zealand: 0800 212 505  
[www.capitalsafety.com.au](http://www.capitalsafety.com.au)  
[sales@capitalsafety.com.au](mailto:sales@capitalsafety.com.au)

now proudly  
part of 3M:

